

412

12 tons

Sollevatore elettroidraulico a 4 colonne
Electrohydraulic 4 post lift
Pont élévateur électro-hydraulique 4 colonnes
Elektroidraulische 4 Säulen Hebebühne
Elevador 4 columnas electro-hidraulico




WERTHER INTERNATIONAL S.p.A..
Via F. BRUNELLESCHI,12 - 42124 CADÈ (RE) -ITALY
Telefono ++ / +522 / 9431 (r.a.) - Telefax ++ / +522 / 941997
WEB <http://www.wertherint.com> - E-mail: sales@wertherint.com

412

Sollevatore elettroidraulico a 4 colonne
 Electrohydraulic 4 post lift
 Pont élévateur électro-hydraulique 4 colonnes
 Elektroidraulische 4 Säulen Hebebühne
 Elevador 4 columnas electro-hidraulico

12 tons

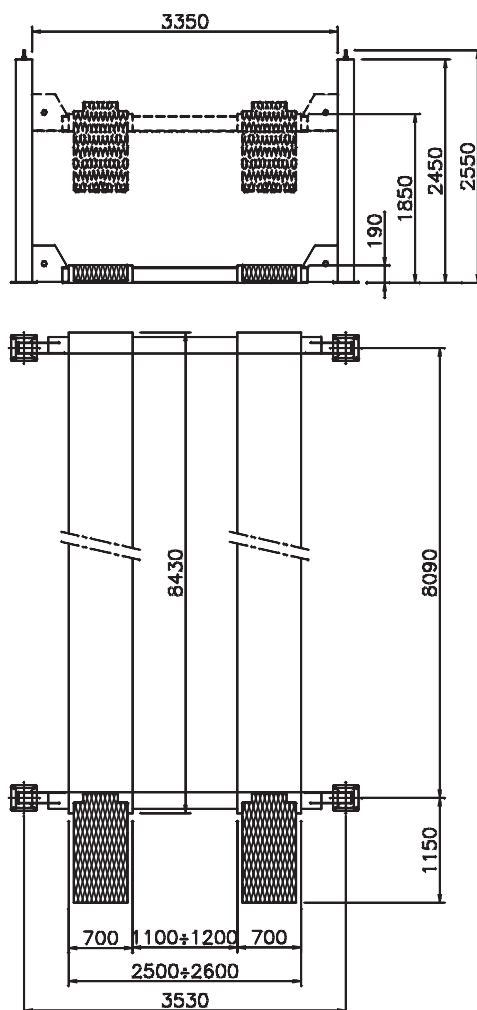

DATI TECNICI - TECHNICAL DATA

Funzionamento / Operation	Elettroidraulico / Electro-hydraulic
Portata / Capacity	12.000 Kg
Peso / Weight	3000 Kg
Tempo di salita/discesa / Lifting/lowering time	55 sec.
Altezza max / Max. lift height (Working floor)	1850 mm.
Motore / Motor	3 KW - 3 ph. 230-400V/50Hz

CARATTERISTICHE TECNICHE

- Sicurezza in caso di rottura fune
- Sicurezza idraulica in caso di sovraccarico
- Valvola di controllo velocità discesa
- Valvola sicurezza in caso di rottura tubo idraulico
- Comandi uomo presente 24V
 Comando sgancio elettrico
 Avvisatore acustico fase finale discesa

TECHNICAL CHARACTERISTICS

- Safety device in case of rope breaking
- Overload safety-device
- Descent control valve
- Safety-valve in case of sudden loss of pressure
- "Dead man" controls 24V
 Electrical controlled fall safety
 Acoustic warning final descent phase



WERTHER INTERNATIONAL S.p.A..

Via F. BRUNELLESCHI,12 - 42124 CADÈ (RE) -ITALY

Telefono ++ / +522 / 9431 (r.a.) - Telefax ++ / +522 / 941997

WEB <http://www.wertherint.com> - E-mail: sales@wertherint.com