


242 - 10
lt. min C.F.M.



**OIL
 FREE**

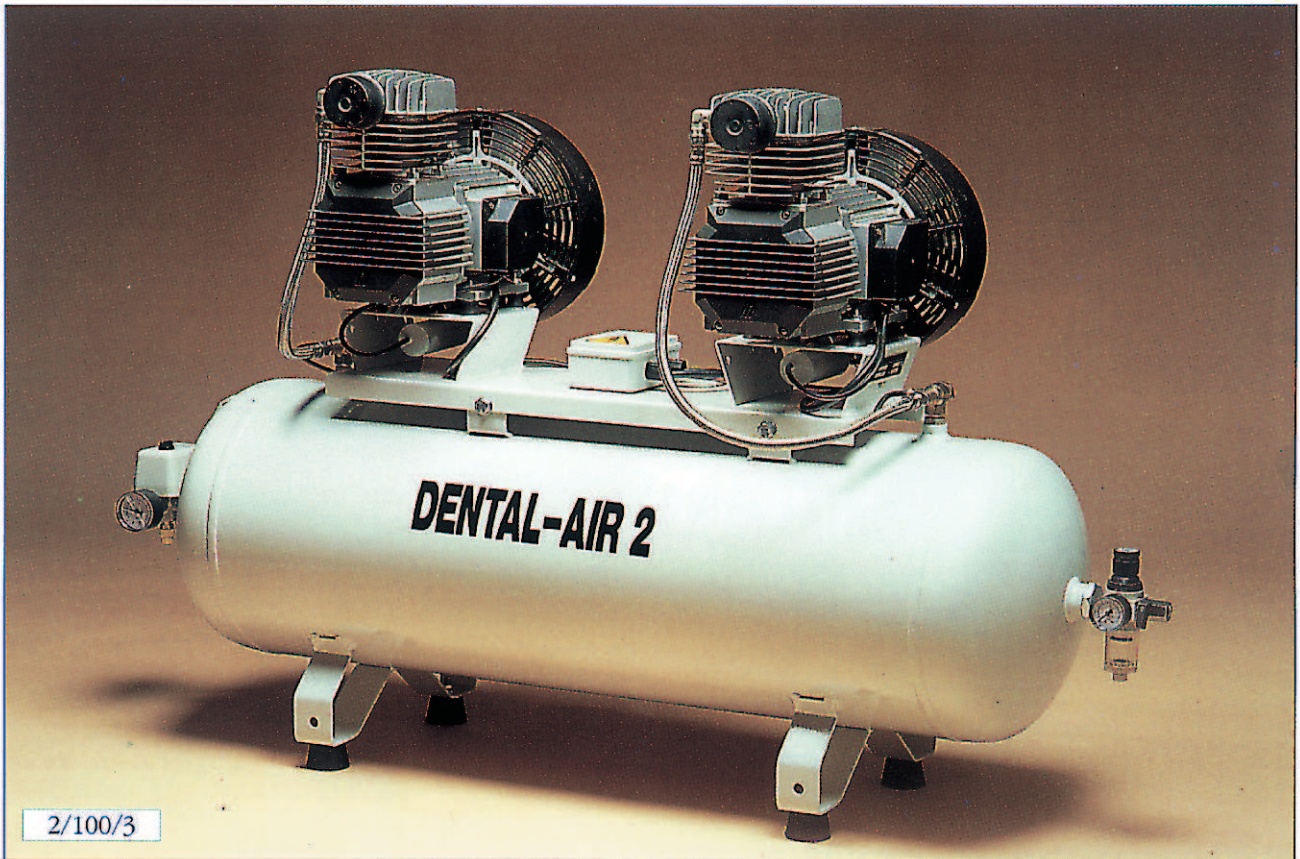

2/100/3

3) Serbatoio orizzontale
 Orizantal tank
 Reservoir horizontal
 Horizontaler Behaelter
 Deposito orizantal

7) Essiccatore
 Drier
 Sècheur
 Trockner
 Secador

		
KW 2,2 HP 3	lt. min 300 C.F.M. 12,8	Lt. 100 Gal. 26



TANDEM	lt.min * C.F.M.	dB/A	Bar Psi	cm.	A x B x C	inch.	Kg Lbs	cm.	A x B x C	inch.	Kg Lbs
2x2/100/3	242 - 9,4	80	7 - 100	135x41x87	53x16x34	85 - 187	145x75x107	57x29x42	100 - 220		
2x2/100/37	242 - 9,4	80	7 - 100	135x65x87	53x26x34	105 - 231	145x75x107	57x29x42	120 - 264		

Volt 220/240 monofase 50 Hz/18 AMPS

Volt 115 singlephase 60 Hz/34 AMPS

*) 5 bar (70 PSI)

