


**OIL
FREE**



**288 - 12,8
lt. min C.F.M.**

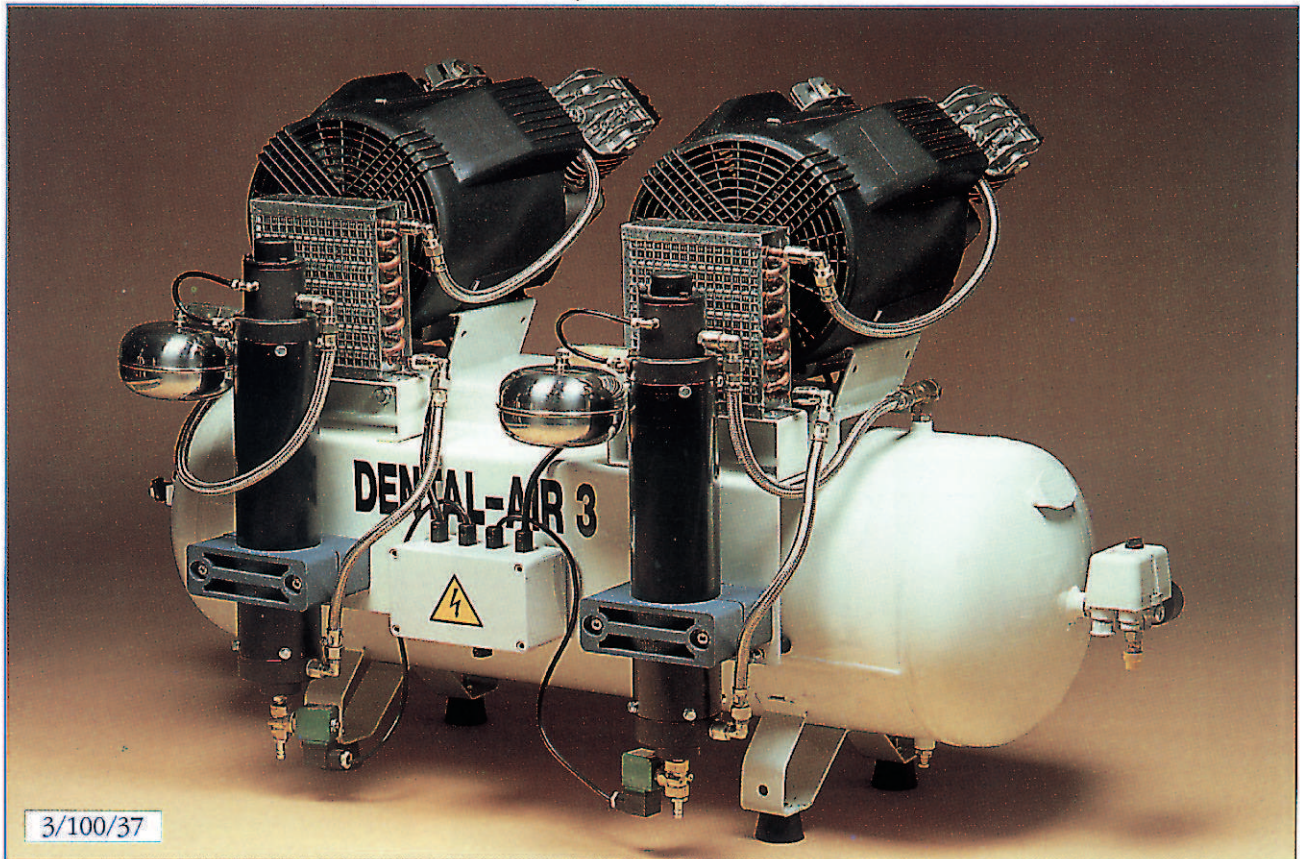

3/100/37

3) Serbatoio orizzontale
Orizantal tank
Reservoir horizontal
Horizontaler Behaelter
Deposito orizantal

7) Essiccatore
Drier
Sêcheur
Trockner
Secador

KW 3 HP 4	lt. min 400 C.F.M. 17,2	Lt. 100 Gal. 26



TANDEM	lt.min * C.F.M.	dB/A	Bar Psi	cm.	A x B x C	inch.	Kg Lbs	cm.	A x B x C	inch.	Kg Lbs
2x3/100/3	288 - 13	80	7 - 100	135x41x87	53x16x34	95 - 209	145x75x107	57x29x42	110 - 242		
2x3/100/37	288 - 13	80	7 - 100	135x65x87	53x26x34	110 - 242	145x75x107	57x29x42	130 - 286		

Volt 220/240 monofase 50 Hz/14 AMPS

Volt 115 singlephase 60 Hz/36 AMPS

*) 5 bar (70 PSI)

